



JETWAVE®

HIGH PRESSURE CLEANERS

Distributed by:

CADET™ 200-15 3000 psi • 15 l/pm



Three Phase



Cold Water



Heavy Duty Usage

FIELDS OF APPLICATION

- Primary Industry
- Factory Washdown
- Cleaning Contractors
- Construction and Mining
- Schools and Universities
- Government and Councils
- Aviation Ground Support
- Transportation and Logistics



The Jetwave® Cadet™ 200-15 is the perfect electric pressure washer for heavy duty frequent usage and applications. Engineered and assembled in Australia with quality Italian and global components.



HERO INNOVATIONS



Durable

Foam filled 14" puncture proof tyres.



Control

Delayed Timer Stop™ (DTS) electronic control for overall unit protection.

STANDOUT FEATURES



Quality Assured IP66 steel powder coated 24 volt low voltage electrical control box for increased protection against dust and water ingress.



Professional Italian triplex Interpump delivers performance and longer life.



Low speed professional pump for increased reliability and longer maintenance intervals.



Maintenance free low speed, electric motor, air cooled and protected with thermal cut-out.



Brass washable inlet water filter.



Jetwave Safety System™ (JSS) thermal valve to prevent overheating in excessive bypass and over pressurisation.



Quality pressure gauge.



Zero brass line pressure loader valve for user safety and flexibility.



Integrated accessory storage for gun and lance.



Professional line accessories.



Jetwave Group
 72-74 Richmond Road
 Keswick | Adelaide
 South Australia | 5035 | AU
 +61 8 8371 3599
 sales@jetwave.com.au
 jetwave.com.au

Robust - Galvanised steel to withstand tough environmental conditions.


Performance - Dependable Italian industrial triplex pump.

Ergonomics - Trolley frame designed for durability.

Portability - Heavy duty double bearing wheels.



STANDARD EQUIPMENT

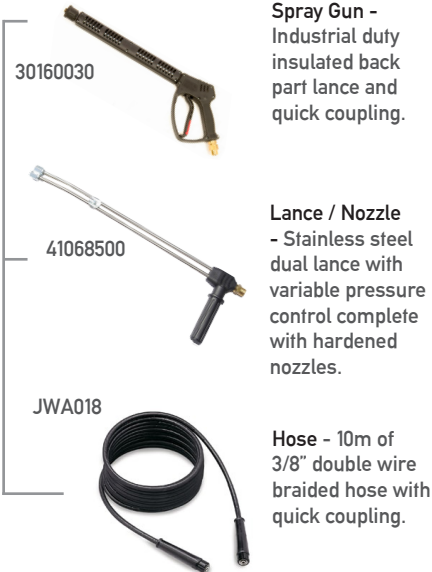

Spray Gun - Industrial duty insulated back part lance and quick coupling.

Lance / Nozzle - Stainless steel dual lance with variable pressure control complete with hardened nozzles.

Hose - 10m of 3/8" double wire braided hose with quick coupling.

OPTIONAL ACCESSORIES

1. Complete Turbo Head with Lance	p/n	JWA158
2. Additional High Pressure Hose (per metre)	p/n	52001
3. High Pressure Swivel	p/n	26105000
4. LS3-1 Foaming Lance with Tank	p/n	JWA221
5. High Pressure Hose Reel (cap 30m or 60m)	p/n	1060CMPL 1065CMPL
6. 12L Stainless Steel Water Bypass Tank	p/n	90008-12S

Product Code	p/n	CW200-15LV
--------------	-----	------------

TECHNICAL DATA

Working Pressure	psi / bar	3000 / 200
Flow Rate	l/pm	15
Max Water Inlet Temp	°c / °f	60 / 140
Class	grade	A (AS/NZS 4233.1:2013)

INTENDED APPLICATION

Usage Frequency	hours / type	4 - 8 daily / Full Industrial
Category of Dirt / Debris	type	Medium

ELECTRICAL FEATURES

Motor	type	Induction
Power Supply	Ph / V / Hz	3 / 415 / 50
Absorbed Power	kW / Pole (rpm)	5.5 / 4 (1400)
Cable Length	metres	8
Control	type	Delayed Timer Stop™ (DTS)

HYDRAULIC FEATURES

Pump / Head / Pistons	type	Interpump Plunger Triplex / Brass (nickel plated) / Ceramic
Motor Pump Coupling	type	Direct Elastic
Pump Speed	rpm	1450
Unloader Valve	type	Independant Zero
Orifice / Nozzle	size	035

OTHER FEATURES

Adjustable Pressure	y / n	Y
Frame Structure	type	Hot dipped galvanised 4 wheel
Onboard Accessory Storage	y / n	Y
Detergent Injector	y / n	Y - Downstream low pressure

DIMENSIONS & WEIGHT

Approx Weight	kg	135 unit / 145 boxed
Unit Dimensions	mm	1100(L) x 770(W) x 720(H)
Boxed Dimensions	mm	1110(L) x 560(W) x 650(H)
Number per Pallet	type; pieces	AS: 2 / Euro: 4

WARRANTY(S)

Motor Warranty	years	2	
Limited Pump Warranty	years	2	
Limited Frame Warranty	years	5	
Limited Accessory Warranty	days	90	



The manufacturer reserves the right to modify design features and technical facts without notice; due to our principals of continuous improvement.

V1.0 11/2017

*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).