

**Jetwave Industrial Equipment**  
Head Office  
72-74 Richmond Road  
Keswick South Australia 5035  
T +61 8 8371 3599  
F +61 8 8371 4497  
sales@jetwave.com.au  
www.jetwave.com.au




## PURPOSE BUILT FOR PROFESSIONAL APPLICATIONS:

- Roof cleaning
- Large plant washdown
- Drain cleaning
- Graffiti removal
- Building washdown
- Construction site & equipment cleaning
- Factory washdown



SHOWN WITH OPTIONAL STAINLESS STEEL WATER TANK.



For further information on your nearest Jetwave distributor and/or enquiries call us on 1800 029 300.

# Professional Cold Water / Petrol / High Pressure Water Cleaners



To view Jetwave product demonstrations scan the code below or visit our YouTube channel at [www.youtube.com/user/JetwaveIndustrial](http://www.youtube.com/user/JetwaveIndustrial)



## Senator Range

### Standout Features and Benefits

- Genuine Honda GX630 or GX690 electric start petrol V-Twin engine.
- > Offers higher horsepower, quiet operation and greater fuel efficiency.
  - > Green and Gold approved and engine matched tested for Australian conditions and compliance laws.
  - > Digital CDI ignition system with variable timing.
  - > Rev limiter to protect against damage from over rewing.
  - > Built-in hour metre and low level oil indicator light for easy service tracking.
  - > Integrated low level oil cut-out protection system.
  - > Automatic mechanical de-compression system.
  - > High efficiency 36 blade cooling fan.

Tough and robust fully welded hot dipped galvanised roll frame with convenient gun and lance holder.

Strong upheld unit design based around longevity, easier maintenance schedule, improved efficiency and increased operator safety.

Quality unparalleled industry proven 'Italian' pump and gearbox.

Built with only recognised highest quality components supported by world-wide spare parts back-up.

Solid brass adjustable unloader valve for increased safety, unit longevity and serviceability.

Professional low pump running speed equating to 50% less maintenance time and increased reliability.

Specialised "long" galvanised motor anti-vibration tray control technology to eliminate frame distortion and/or damage.

### Standard Accessories Include

10m of 3/8" double wire braid blue 'non marking' high pressure hose (includes quick release coupling).

Ergonomic heavy duty spray gun with back part lance and quick coupling.\*

Stainless steel dual lance with variable pressure control complete with nozzles.\*

Single stainless steel lance complete with soft trigger spray gun.\*\*



## Jetwave Industrial Equipment

Head Office  
72-74 Richmond Road  
Keswick South Australia 5035  
T +61 8 8371 3599  
F +61 8 8371 4497  
sales@jetwave.com.au  
www.jetwave.com.au

For further information on your nearest Jetwave distributor and/or enquiries call us on 1800 029 300.



## Senator Range

### Standard Specifications and Features

3600 - 5800 psi pump working pressure.

18 - 26 litres per minute water flow rate.

Professional 'Italian' triplex ceramic piston plunger pump, complete with stainless steel valves and solid brass and/or nickel plated head with oil indication sight glass.

1450 rpm low pump running speed via a directly coupled 2:1 reduction gearbox with easy oil indication sight glass.

Maintenance free battery with charge indicator and heavy duty looms.

Extra support via pump mounts.

High pressure back up safety relief valve.\*\*

Thermal valve for by-pass pump protection (not required if tank fitted).

Brass 'Y' stainless steel water inlet strainer.

Adjustable detergent injection facility under low pressure complete with detergent tubing and chemical filter.\*

14" heavy duty pneumatic wheels for easy mobility.

Durable stainless steel pressure gauge with glycerine.

High pressure hose quick release coupling system.

Quality German made hardened stainless steel high pressure nozzle.

20 litre plastic fuel tank.

Skid mount options available on request.

Complete operator and maintenance manuals.

### Warranty

Jetwave's 12 month manufacturer warranty. CONDITIONS APPLY

Honda Green & Gold tested and approved  
3 year GX engine warranty.




### Optional Extra Accessories

- 1 Complete 'Turbo' Head with Stainless Steel Lance.
- 2 'MR-O' Brass or Stainless Steel High Pressure Swivel.
- 3 Industrial High Pressure Hose Reel with 30 or 60m Capacity, including leader hose.
- 4 Additional High Pressure Hose; 3/8" Double Wire Braid Blue 'non marking'.
- 5 'Whirl-Away' 22" and/or 30" Rotary Floor Cleaner.\*\*
- 6 Stainless Steel Snap-on Fittings.
- 7 Sandblasting Kits.
- 8 Lances of different lengths. NOT SHOWN BELOW
- 9 Optional Stainless Steel Water Tank. SEE MAIN PICTURE
- 10 Stainless Steel Fuel Tank. NOT SHOWN BELOW



SENATOR 350

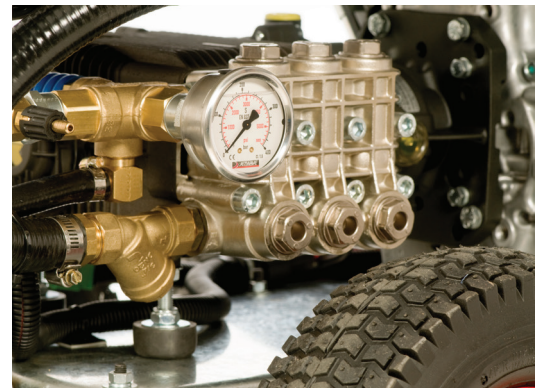

THE MANUFACTURER RESERVES THE RIGHT TO MODIFY DESIGN FEATURES AND TECHNICAL FACTS WITHOUT NOTICE.

To view Jetwave product demonstrations scan the code below or visit our YouTube channel at [www.youtube.com/user/JetwaveIndustrial](http://www.youtube.com/user/JetwaveIndustrial)



\* FEATURE PRESENT ONLY ON JETWAVE MODEL 252 & 280

\*\* FEATURE PRESENT ONLY ON JETWAVE MODEL 350

PLEASE NOTE: WEIGHTS ARE BASED ON STANDARD VERSIONS ONLY.

MODEL	PRODUCT CODE	PUMP	WORKING PRESSURE PSI	BAR	FLOW RATE LPM	PETROL ENGINE	RPM	APPROX WEIGHT (UNIT ONLY)	MACHINE DIMENSIONS	BOXED DIMENSIONS
Senator 252	HP252-21PE	Interpump WS252 (47 HP Series)	3600	250	21	Honda GX630	1450 RPM via Interpump RS500 Gearbox	160	1120mm (L) x 700mm (W) x 900mm (H)	1100mm (L) x 600mm (W) x 820mm (H)
Senator 280-21	HP280-21PE	Annovi Reverberi (AR) XW 21.28N (Series 194)	4060	280	21	Honda GX630	1450 RPM via Interpump RS500 Gearbox	160	1120mm (L) x 700mm (W) x 900mm (H)	1100mm (L) x 600mm (W) x 820mm (H)
Senator 280-26	HP280-26PE	Annovi Reverberi (AR) XW 26.28 (Series 194)	4060	280	26	Honda GX690	1450 RPM via Interpump RS500 Gearbox	160	1120mm (L) x 700mm (W) x 900mm (H)	1100mm (L) x 600mm (W) x 820mm (H)
Senator 350-21	HP350-21PE	Annovi Reverberi (AR) SXW 21.35 (Series 194)	5100	350	21	Honda GX690	1450 RPM via Interpump RS500 Gearbox	160	1120mm (L) x 700mm (W) x 900mm (H)	1100mm (L) x 600mm (W) x 820mm (H)
Senator 350-23	HP350-23PE	Interpump W3523 (66 HP Series)	5075	350	23	Honda GX690	1450 RPM via Interpump RS500 Gearbox	170	1120mm (L) x 700mm (W) x 900mm (H)	1100mm (L) x 600mm (W) x 820mm (H)
Senator 400	HP400-18PE	Interpump W4018 (66 HP Series)	5800	400	18	Honda GX690	1450 RPM via Interpump RS500 Gearbox	170	1120mm (L) x 700mm (W) x 900mm (H)	1100mm (L) x 600mm (W) x 820mm (H)